



• OVAL FOUDRES •

TOAST

3 recipes: untoasted, light or medium.
Toasting penetration over 10 mm.

WOOD

Eastern European Oak with superior quality fine grain.
French Oak with superior quality extra fine grain.
100% certified origin.
Dried outdoors for up to 10 months per centimeter of thickness.

VOLUME	1,000 lt	1,500 lt	2,000 lt	2,500 lt	3,000 lt	3,500 lt	4,000 lt	5,000 lt
STAVE LENGTH	1,300 mm	1,500 mm	1,600 mm	1,700 mm	1,800 mm	1,900 mm	2,000 mm	2,100 mm
BASE DIAMETER	1,100 mm	1,300 mm	1,400 mm	1,500 mm	1,600 mm	1,650 mm	1,750 mm	1,800 mm
HEIGHT	1,400 mm	1,700 mm	1,800 mm	1,900 mm	2,050 mm	2,150 mm	2,250 mm	2,350 mm
STAVE THICKNESS	55 mm	55 mm	55 mm	55 mm	55 mm	55 mm	65 mm	65 mm
BASE THICKNESS	55 mm	55 mm	55 mm	65 mm	65 mm	65 mm	65 mm	65 mm

ZINC COATED HOOPS

Zinc coated iron - Manufactured in Austria, 6/8 hoops per barrel.

BUNG

White Silicon - Food grade.

FRONT INSPECTION DOOR

Wooden.

VALVE

Stainless steel placed on the door's entrance. Diameter and lock as chosen.

SAMPLER

Stainless steel placed on the front at the bottom.

SUPPORTS


Two wooden supports under the barrel.

VARNISH


Upon request - transparent, natural varnish on the external surface to protect against fungi.

TR

· COOPERS ·

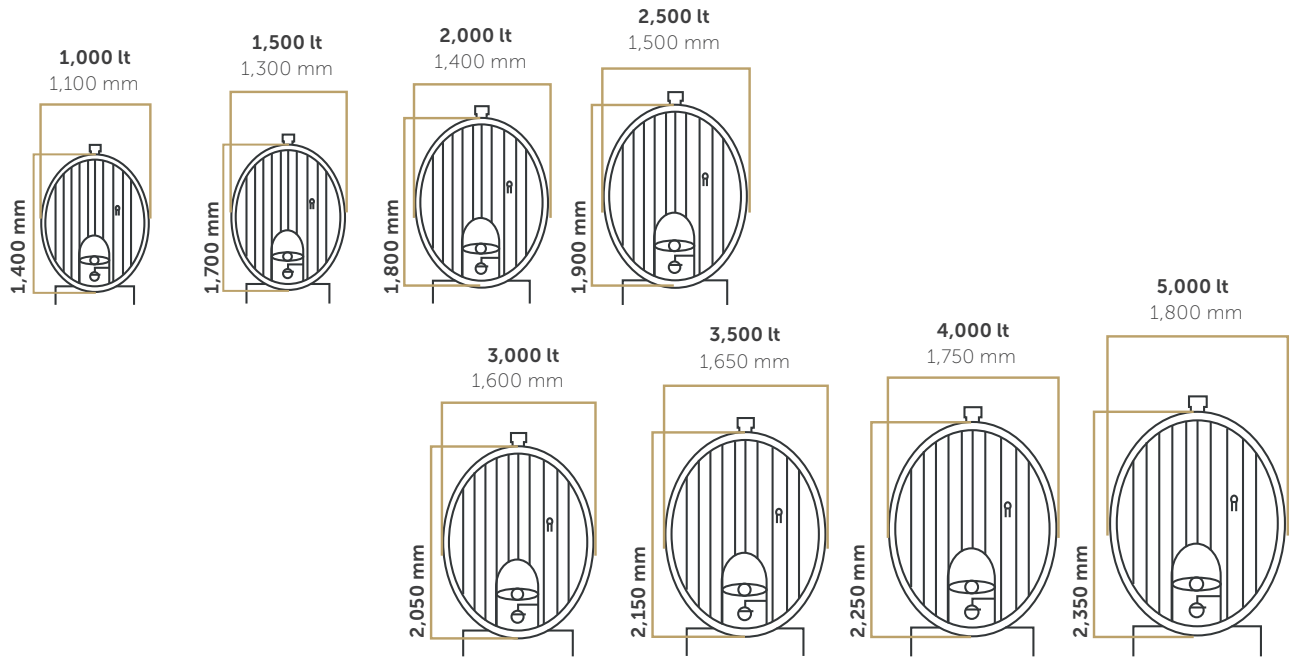

FRONT VIEW

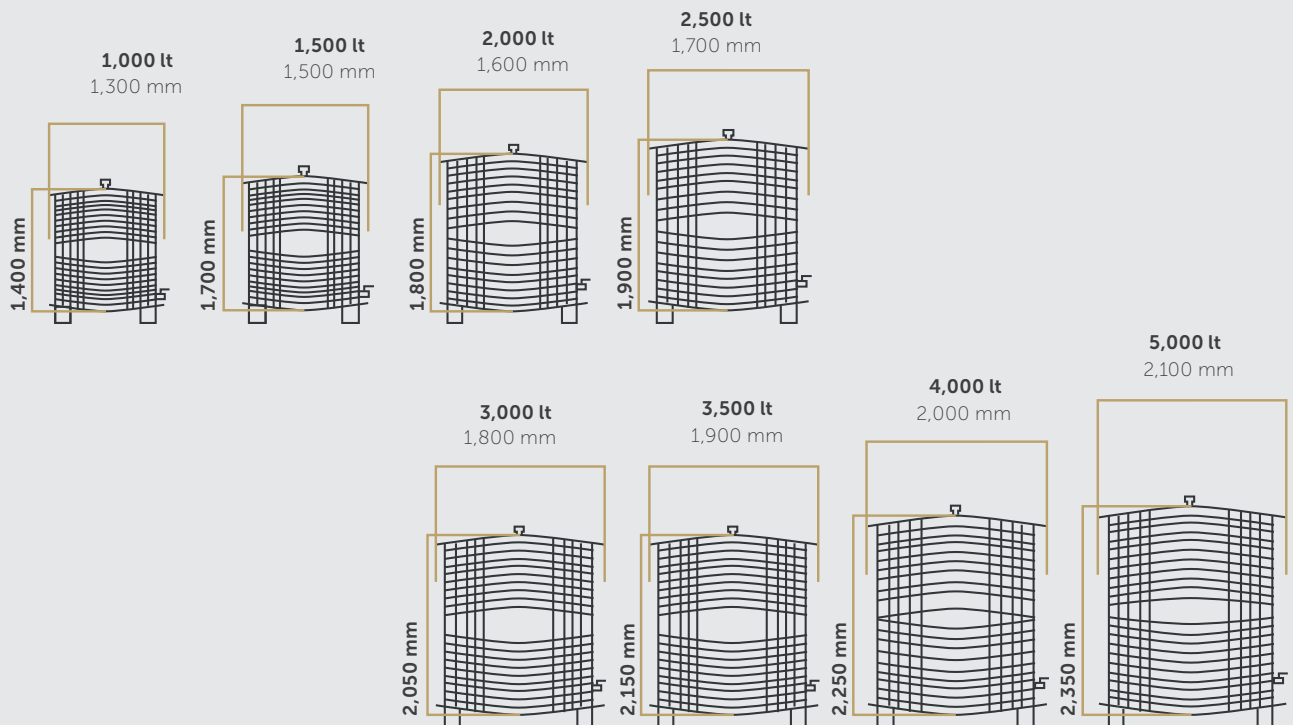

SIDE VIEW