



TANK FOUDRE

TOAST

3 recipes: untoasted, light or medium.
Toasting penetration over 10 mm.

WOOD

Eastern European Oak with superior quality fine grain.
French Oak with superior quality extra fine grain.
100% certified origin.
Dried outdoors for up to 10 months per centimeter of thickness.

VOLUME	1,000 lt	1,500 lt	2,000 lt	2,500 lt	3,000 lt	3,500 lt	4,000 lt	5,000 lt
STAVE LENGTH	1,300 mm	1,400 mm	1,500 mm	1,600 mm	1,700 mm	1,700 mm	1,800 mm	2,000 mm
BASE DIAMETER	1,200 mm	1,400 mm	1,600 mm	1,700 mm	1,800 mm	1,900 mm	1,900 mm	2,100 mm
STAVE THICKNESS	55 mm	55 mm	55 mm	55 mm	55 mm	55 mm	55 mm	55 mm
BASE THICKNESS	55 mm	55 mm	55 mm	55 mm	65 mm	65 mm	65 mm	65 mm

ZINC COATED HOOPS

Zinc coated iron - Manufactured in Austria, 4/10 hoops per barrel.

UPPER BASE DOOR

Made from stainless steel, 18/8 AISI 316, size options.

FRONT INSPECTION DOOR

Made from stainless steel, located to the side of the door. Diameter and lock to be chosen.

RACKING VALVE

Stainless steel placed on the door's entrance. Diameter and lock to be chosen.

BOTTOM VALVE

Bottom stainless steel valve with chosen diameter.

SAMPLER

Installed on stainless steel door.

SUPPORTS

Two wooden supports under the barrel.

VARNISH


Upon request - transparent, natural varnish on the external surface to protect against fungi.

STAVE HEAD


Transparent natural color or painted for aesthetics, as requested.

TR

· COOPERS ·

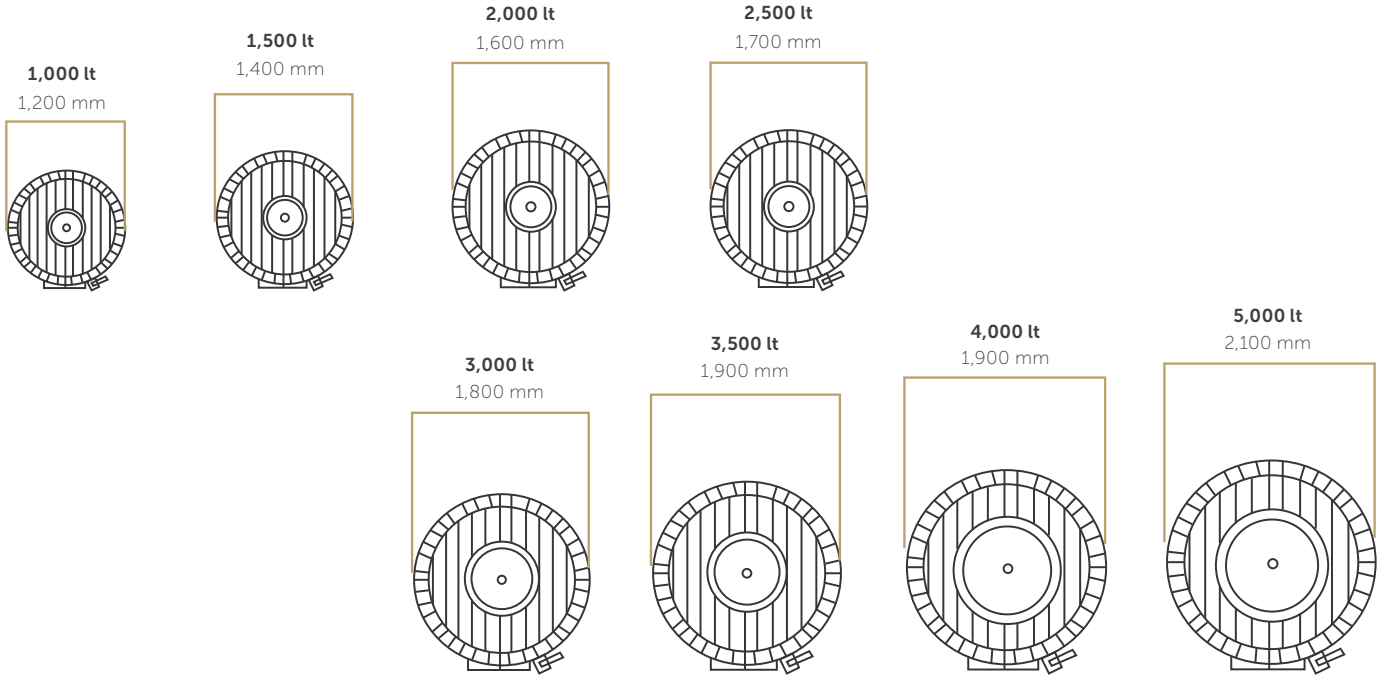

FRONT VIEW

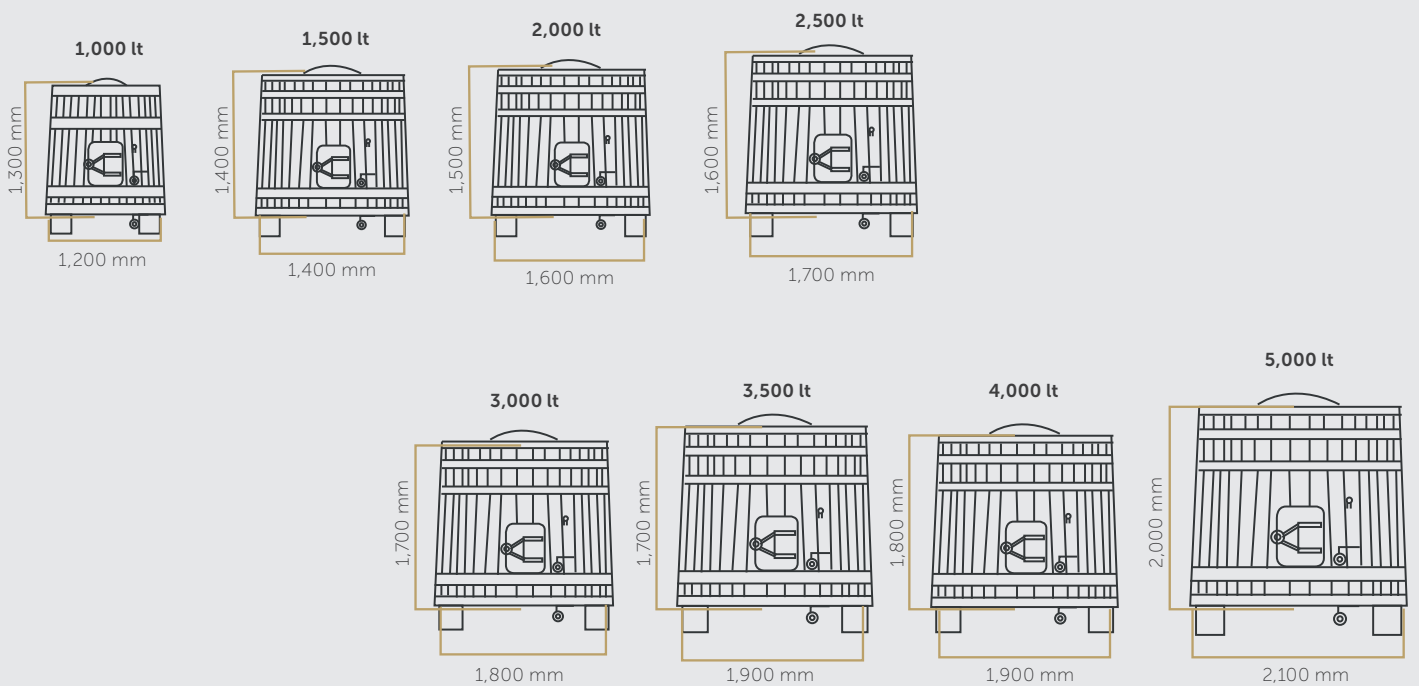

SIDE VIEW